


M公制螺纹/Metric Thread

序号 No.	产品名称 Part code	产品料号 Part NO.	螺纹规格AG Thread size	扳手尺寸SW Wrench size	卡口范围 Clamping range	屏蔽卡口范围 Clamping range,shield	重量/Weight g
1	EMC.AMC-M25(D10.5-14/D6-11)	3629250112	M25*1.5	28	10.5-14	6-11	34
2	EMC.AMC-25(D14-17/D9-13)	3629250102	M25*1.5	28	14-17	9-13	36.6
3	EMC.AMC-25(D10.5-14/D9-13)	3629250122	M25*1.5	28	10.5-14	9-13	36.8

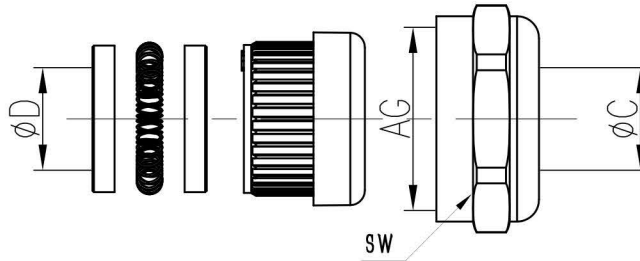


技术参数:

- 材料:
 - 螺帽: 黄铜镀镍
 - 密封元件: 热塑性弹性体
- 温度范围:
 - 静态: -40°C - 100°C
 - 动态: -20°C - 80°C
- 防护等级: IP65

Technical specification:

- Material:
 - Nut: nickel-plated brass
 - Sealing: TPE
- Temperature range:
 - Stat: -40°C - 100°C
 - Dyn: -20°C - 80°C
- Degree of protection: IP65

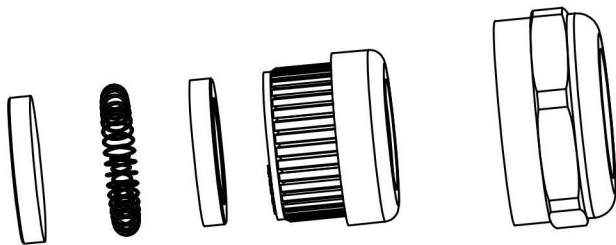

						表面处理 Finish	-		图号 Drawing No.	-
						材料 Material	-		产品代号 Part Code	HDXBSCN-XX
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date			产品料号 Part No.	-
		姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.
绘图 Drawn			2017.2.16	标准化 Stand.	-	-	1:1	V1.0	-	-
审核 Checked			2017.2.16							
工艺 Process		-	-	批准 Approved		2017.2.16			All Dimensions in mm Original Size DIN A 4	
									浙江西霸士电气有限公司	